

EC type examination certificate
EU-Baumusterprüfbescheinigung

CE-0085CQ0472

Product Identification No.
 Produkt-Identnummer

Field of Application <i>Anwendungsbereich</i>	EC Gas Appliances Regulation (EU/2016/426) <i>EU-Gasgeräteverordnung (EU/2016/426)</i>
Owner of Certificate <i>Zertifikatinhaber</i>	Kühme Armaturen GmbH Am Vorort 14, D-44894 Bochum
Distributor <i>Vertreiber</i>	Kühme Armaturen GmbH Am Vorort 14, D-44894 Bochum
Product Category <i>Produktart</i>	accessories for gas appliances/pressure equipment: Automatic shut-off valve (4128)
Product Description <i>Produktbezeichnung</i>	automatic shut-off valve with pneumatic actuator with fast-close operation in case of breakdown of the auxiliary energy for gas burners and gas appliances
Model <i>Modell</i>	KVH ... -HT
Countries of Destination <i>Bestimmungsländer</i>	AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MT, NL, NO, PL, PT, RO, SE, SI, SK
Test Reports <i>Prüfberichte</i>	type testing: V 435 2017 B6 from 09.10.2017 (TRG)
Test Basis <i>Prüfgrundlagen</i>	EU/2016/426 A III B (09.03.2016) DIN EN 161 (01.04.2013)- partially DIN EN 16678 (01.02.2016)


Validity / File no. 21.04.2018 until 19.12.2027 / 17-0813-GEA
Gültigkeit / AZ

19.12.2017 Rie A-1/2

Date, Issued by, Sheet, Head of Certification Body
 Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle

DVGW CERT GmbH is an accredited body by DAkkS according to DIN EN ISO/IEC 17065:2013 and notified by the government of the Federal Republic of Germany for certification of gas appliances under EC Regulation

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013 akkreditierte und von der Deutschen Bundesregierung benannte Stelle für die Zertifizierung von Gasgeräten gemäß EU-Verordnung EU/2016/426.

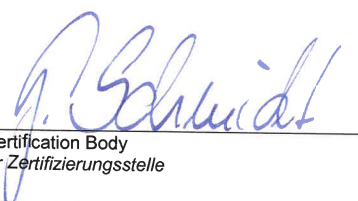


Deutsche
 Akkreditierungsstelle
 D-ZE-16028-01-01

DVGW CERT GmbH
 Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
 53123 Bonn

Tel. +49 228 91 88 - 888
 Fax +49 228 91 88 - 993

www.dvgw-cert.com
 info@dvgw-cert.com

Type <i>Typ</i>	Technical Data <i>Technische Daten</i>	Remarks <i>Bemerkungen</i>
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 80	
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 100	
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 125	
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 150	
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 200	
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 250	
KVH-HT; KVH/R-HT; KVH/S-HT	nominal diameter: DN 300	

Type Variation <i>Ausführungsvariante</i>	Explanations <i>Erläuterungen</i>
...R...	with hydraulic opening delay
...S...	control valve with position regulator

Hints of Utilization /Remarks

Verwendungshinweise / Bemerkungen

connection: on both sides flanges or welding ends

ambient temperature range: -29...+80 ° C

valve class: A

valve group: 2

max. operating pressure: PS=50 bar (flanges or welding ends ANSI class 300 and class 600), PS=40 bar (flanges DIN PN 40 and PN 100)

installation position: any